PLATFON®

TAKE PROFESSIONALISM
TO THE NEXT LEVEL

CRAWLER SCISSOR LIFT

PCS - 08



All Terrain Capability

Auto Leveling Outriggers


Easy Maintenance


STANDARD FEATURES


- Emergency stop
- Emergency lowering
- Overload protection
- Descent protection alarm
- Tilt level protection
- Safety arm
- Automatic leveling
- Motion alarm
- Dual-sided LED
- Horn
- Forklift transport pockets
- Hour meter
- Automatic braking system
- Fault diagnosis system
- Charger protection
- Proportional control
- Folding guardrails
- Manual brake release
- Self-lubricating bearing

OPTIONS

- Platform anti-collision system
- Air line to platform
- Pipe carrying bracket
- AC power to platform
- Platform LED work light
- Custom color option

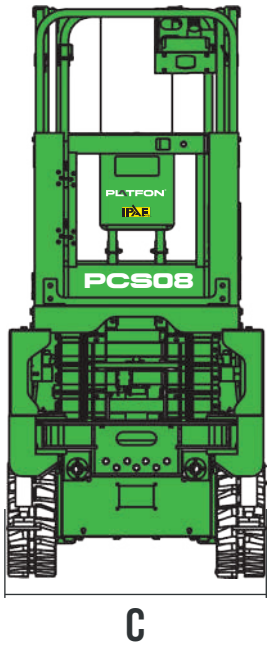

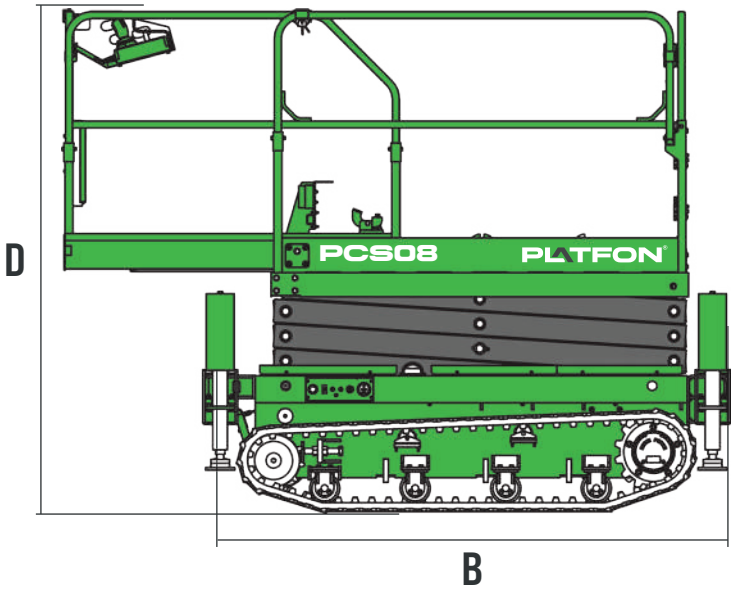

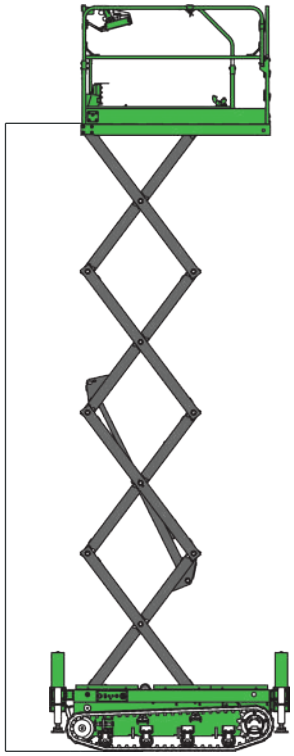

ÖLÇÜLER

Maximum Working Height	8.00m
(A) Maximum Platform Height	6.00m
(B) Length (Stowed)	2.27m
(C) Width	0.96m
(D) Height (Rails Up)	2.14m
Height (Rails Down)	1.67m
Platform Dimensions	1.80x0.78m
Platform Extension	0.90m
Ground Clearance	0.15m

PERFORMANCE

Max. Occupancy	2
Lift Capacity	230kg
Lift Capacity (Platform Extension)	113kg
Drive Speed (Stowed)	2.0km/h
Drive Speed (Raised)	0.8km/h
Gradeability	30%
Turning Radius (Inside)	0m
Turning Radius (Outside)	0m
Lifting and Lowering Time	38/28sec.
Maximum Working Slope (Outriggers Retracted)	01.5°/2°

POWER

Battery	2X12V/115Ah
Battery Charger	40A
System Voltage	24V

WEIGHT

Weight	1875kg