
PLATFON®

TAKE PROFESSIONALISM
TO THE NEXT LEVEL

SCISSOR LIFT

PS - 10N



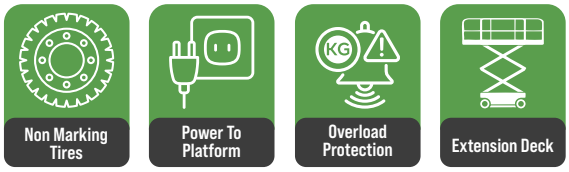


STANDARD FEATURES

- Emergency stop
- Automatic pothole protection
- Emergency lowering system
- Overload protection
- Descent alarm
- Tilt protection
- Safety arm
- Motion alarm
- Dual-sided LED
- Horn
- Drivable at full height
- Non-marking tires
- Forklift pockets
- Hour meter
- Anti-collision plate
- Automatic braking system
- On-board diagnostic system
- Charger protection
- Proportional controls
- Fold-down guardrails
- Manual brake release
- Self-lubricating bearings

OPTIONS

- Platform anti-collision system
- Air line to platform
- Pipe cradle attachment
- AC power to platform
- Platform LED work light
- Custom color option

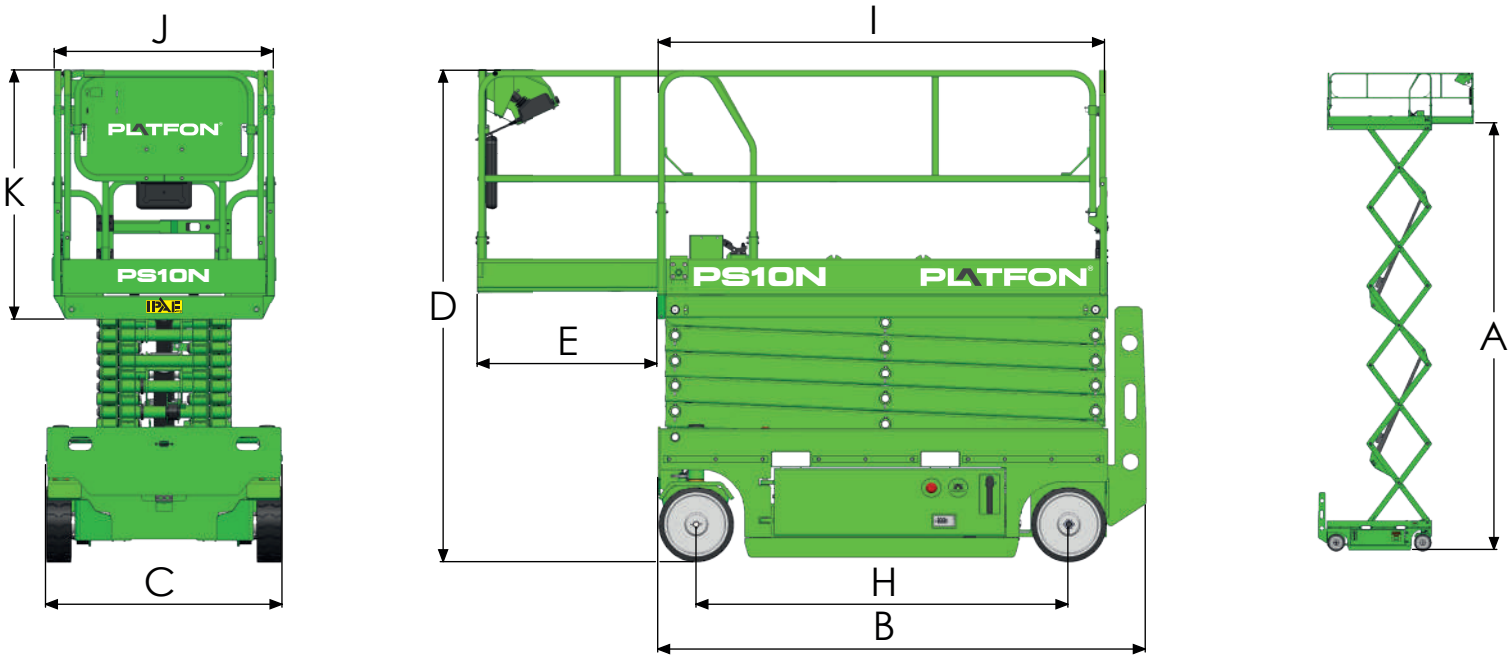

DIMENSIONS

Max. Working Height	9.8m
(A) Max. Platform Height	7.8m
(B) Length (Stowed)	2.475m
(C) Width	0.85m
(D) Height (Guardrails Up)	2.36m
Height (Guardrails Folded)	1.83m
(I x J x K) Platform Dimensions	2.30x0.81x1.10m
(E) Platform Extension	0.9m
(H) Wheelbase	1.92m
Ground Clearance (Pothole Guard Stowed)	0.06m
Ground Clearance (Pothole Guard Deployed)	0.02m

WEIGHT

Weight	2150kg

PERFORMANCE

Max. Occupancy	2/1
Lift Capacity	230kg
Lift Capacity (Platform Extension)	113kg
Drive Speed (Stowed)	3.5km/h
Drive Speed (Raised)	0.8km/h
Gradeability	25%
Turning Radius (Inside)	0m
Turning Radius (Outside)	2.35 m
Max. Working Slope (X/Y)	1.5° /3°
Raise / Lower Time	35/30sec.
Tire Size	381x127mm

POWER

Battery	24V/200Ah
Battery Charger	24V/30A