
SCISSOR LIFT

PS - 14



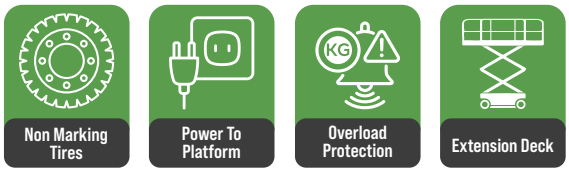


STANDARD FEATURES

- Emergency stop
- Automatic pothole protection
- Emergency lowering system
- Overload protection
- Descent alarm
- Tilt protection
- Safety arm
- Motion alarm
- Dual-sided LED
- Horn
- Drivable at full height
- Non-marking tires
- Forklift pockets
- Hour meter
- Anti-collision plate
- Automatic braking system
- On-board diagnostic system
- Charger protection
- Proportional controls
- Fold-down guardrails
- Manual brake release
- Self-lubricating bearings

OPTIONS

- Platform anti-collision system
- Air line to platform
- Pipe cradle attachment
- AC power to platform
- Platform LED work light
- Custom color option

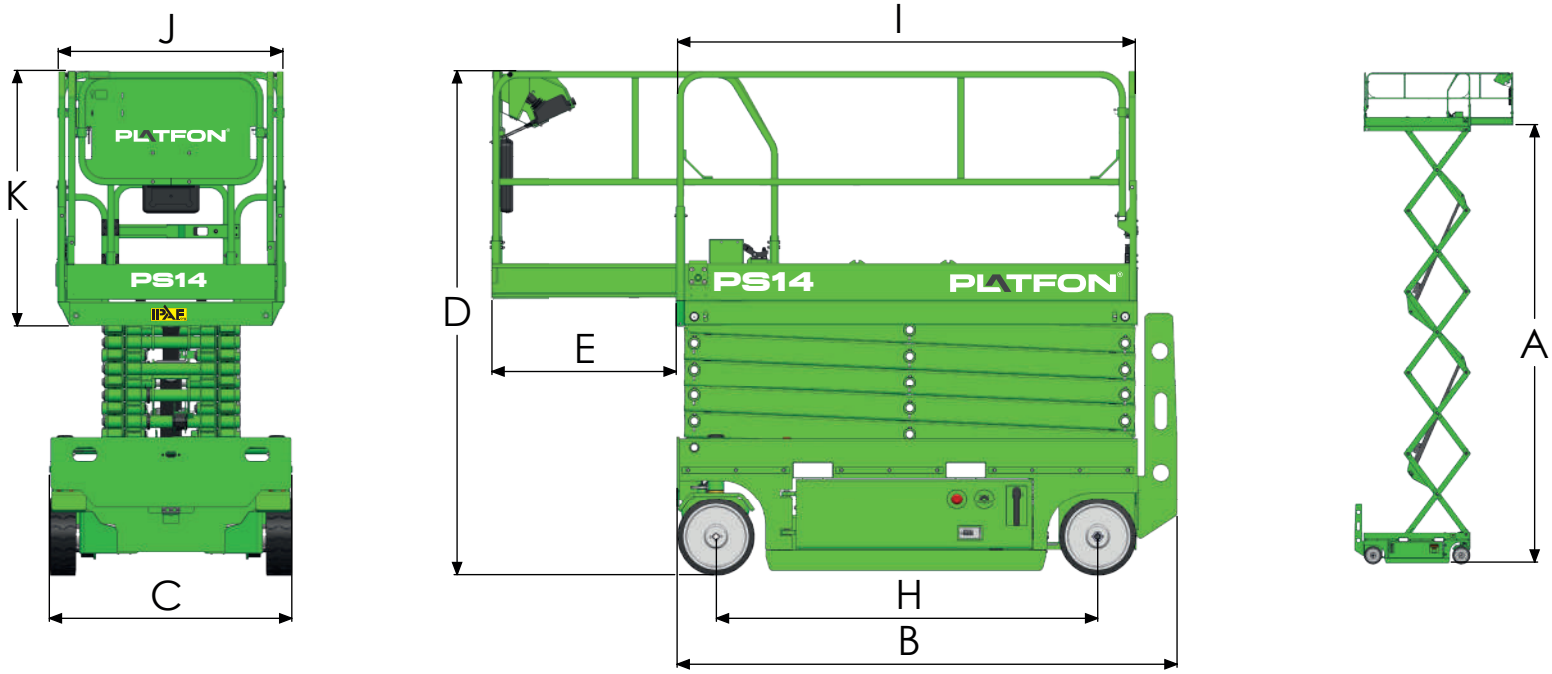

DIMENSIONS

Maximum Working Height	13.8m
(A) Maximum Platform Height	11.8m
(B) Length (Stowed)	2.475m
(C) Width	1.18m
(D) Height (Rails Up)	2.60m
Height (Rails Down)	2.0m
(IxJxK) Platform Dimensions	2.3x1.15x1.10m
(E) Platform Extension	0.9m
(H) Wheelbase	1.92m
Ground Clearance (Pothole Closed)	0.1m
Ground Clearance (Pothole Open)	0.02

WEIGHT

Weight	2950kg

PERFORMANCE

Max. Occupancy	2/1
Lift Capacity	320kg
Lift Capacity (Platform Extension)	113kg
Drive Speed (Stowed)	3.5km/h
Drive Speed (Raised)	0.8km/h
Gradeability	25%
Turning Radius (Inside)	0m
Turning Radius (Outside)	2.35m
Working Slope (X/Y)	1.5°/3°
Lifting and Lowering Time	70/78sec.
Wheel Dimensions	381x127mm

POWER

Battery	24V/200Ah
Battery Charger	24V/30A