PLATFON®

TAKE PROFESSIONALISM
TO THE NEXT LEVEL

CRAWLER SCISSOR LIFT

PCS - 14




All Terrain Capability


Auto Leveling Outriggers

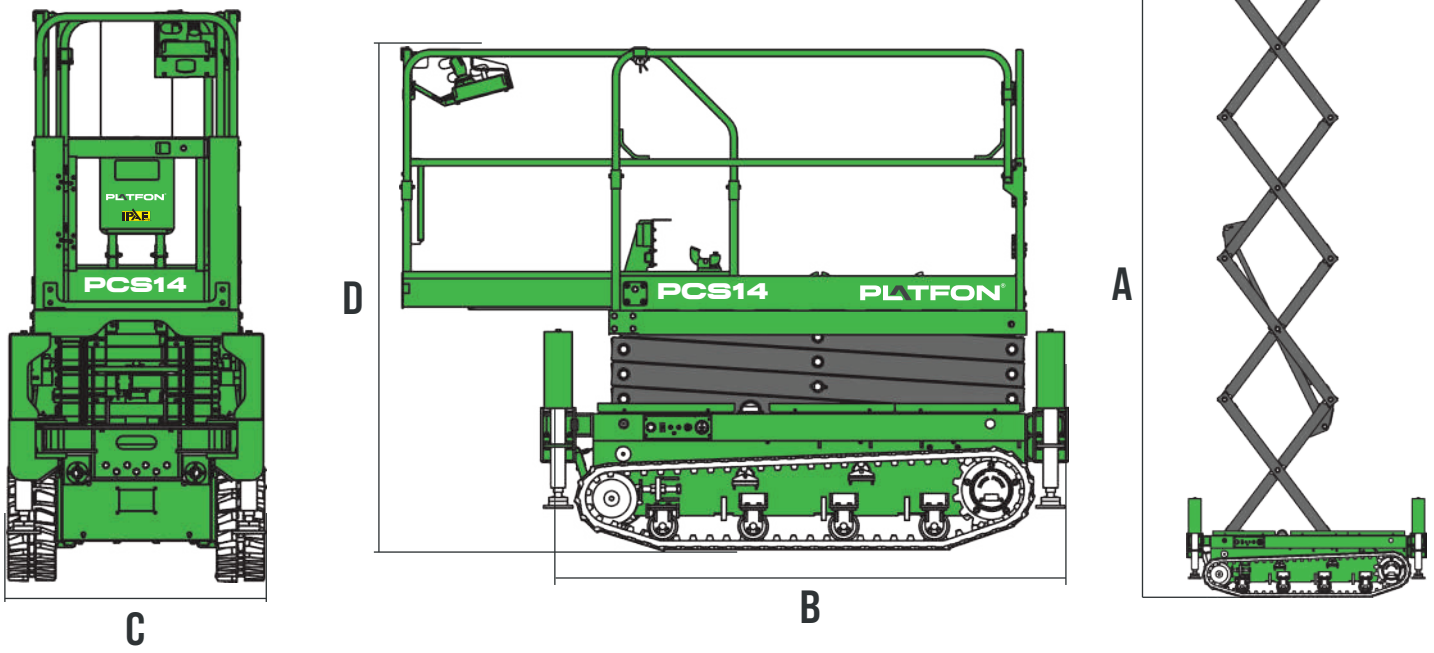

Easy Maintenance

STANDARD FEATURES

- Emergency stop
- Emergency lowering
- Overload protection
- Descent protection alarm
- Tilt level protection
- Safety arm
- Automatic leveling
- Motion alarm
- Dual-sided LED
- Horn
- Forklift transport pockets
- Hour meter
- Automatic braking system
- Fault diagnosis system
- Charger protection
- Proportional control
- Folding guardrails
- Manual brake release
- Self-lubricating bearing

OPTIONS

- Platform anti-collision system
- Air line to platform
- Pipe carrying bracket
- AC power to platform
- Platform LED work light
- Custom color option



DIMENSIONS

Maximum Working Height	13.80m
(A) Maximum Platform Height	11.80m
(B) Length (Stowed)	2.66m
(C) Width	1.58m
(D) Height (Rails Up)	2.63m
Height (Rails Down)	2.12m
Platform Dimensions	2.28x1.15m
Platform Extension	0.90m
Ground Clearance	0.15m

POWER

Battery	8x6V/225Ah
Battery Charger	30A
System Voltage	48V

PERFORMANCE

Max. Occupancy	2
Lift Capacity	318kg
Lift Capacity (Platform Extension)	113kg
Drive Speed (Stowed)	3.2km/h
Drive Speed (Raised)	0.8km/h
Gradeability	30%
Turning Radius (Inside)	0m
Turning Radius (Outside)	
Lifting and Lowering Time	72/68sec.
Maximum Working Slope (Outriggers Retracted)	0.5°/0.5°

WEIGHT

Weight	3380kg